





#### ■ Features

- · Constant Power mode output
- Metal housing design
- Full Power at 70~100% max. current
- · Built-in active PFC function
- No load power consumption < 0.5W</li>
- IP67 rating for indoor or outdoor installations
- Output current adjustable via potentiometer
- · 3 years warranty

# Applications

- · LED flood lighting
- · LED decorative lighting
- · LED architectural lighting

# Description

FDLC-100 series is a 100W LED AC/DC LED power supply featuring the constant power mode output, FDLC-100 operates from  $180 \sim 295 \text{VAC}$  and output current can be adjust between 1300 mA to 3000 mA. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -30%  $\sim +90\%$  case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. FDLC-100 is equipped with output current adjustable function so as to provide the optimal design flexibility for LED lighting system.

# Model Encoding




#### **SPECIFICATION**

MODEL		FDLC-100			
OUTPUT	OUTPUT CURRENT REGION	1300~ 3000mA(1850mA default)			
	RATED POWER Note.2	100W			
	CONSTANT CURRENT REGION Note.2	30 ~ 54V			
	FULL POWER CURRENT RANGE	1850 ~ 3000mA			
	OPEN CIRCUIT VOLTAGE(max.)	59V			
	CURRENT TOLERANCE	±5.0%			
	SET UP TIME Note.3	500ms/230VAC			
INPUT	VOLTAGE RANGE	180 ~ 295VAC 254 ~ 417VDC (Please refer to "STATIC CHARACTERISTIC" section)			
	FREQUENCY RANGE	47 ~ 63Hz			
	POWER FACTOR (Typ.)	PF≥0.9(@load≥70%/230VAC; @load≥75%/277VAC) (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)			
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧70%/230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)			
	EFFICIENCY (Typ.)	90%			
	AC CURRENT (Typ.)	0.7A / 230VAC			
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=270µs measured at 50% Ipeak)/230VAC; Per NEMA 410			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	9 units (circuit breaker of type B) / 16 units (circuit breaker of type C) at 230VAC			
	LEAKAGE CURRENT	<0.75mA / 277VAC			
	NO LOAD POWER CONSUMPTION	<0.5W			
PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed			
	OVER TEMPERATURE	Shut down output voltage, recovers automatically after fault condition is removed			
	WORKING TEMP.	Tcase=-30 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)			
	MAX. CASE TEMP.	Tcase=+90°C			
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-30 ~ +80°C, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)			
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes			
SAFETY & EMC	SAFETY STANDARDS	EN61347-1,EN61347-2-13 Independent, EN62384,GB19510.1,GB19510.14,EAC TP TC 004,IP67 approved			
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC			
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH			
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (load ≥70%); EN61000-3-3, GB17743, GB17625.1, EAC TP TC 020			
	EMC IMMUNITY	$Compliance \ to \ EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547, light industry level (surge immunity: Line-Earth: 4KV, Line-Line: 2KV), EAC \ TPTC \ 020000000000000000000000000000000000$			
OTHERS	MTBF	1229.7K hrs min. Telcordia SR-332 (Bellcore) 459.8Khrs min. MIL-HDBK-217F ( $25^{\circ}$ C)			
	DIMENSION	180*53*33mm (L*W*H)			
	PACKING	0.625Kg;24pcs /16Kg / 0.8CUFT			
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.  2. Please refer to "OUTPUT CURRENT SETTING".  3. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.  4. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.  5. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a> 6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft)  7. For any application note and IP water proof function installation caution, please refer our user manual before using.  https://www.meanwell.com/Upload/PDF/LED_EN.pdf				



## **■** BLOCK DIAGRAM

PWM fosc: 60~130KHz

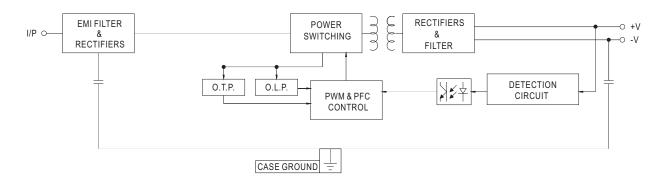


### ■ OUTPUT CURRENT SETTING

OI-V Operating Area.

Output rated current level can be adjusted through built-in potentiometer


### FDLC-100

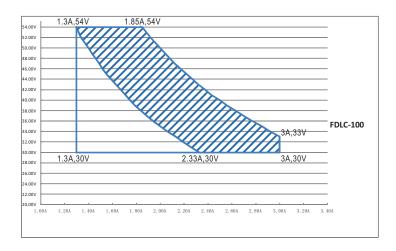

High Performance Region — Operational Region

Note:output power≤100W



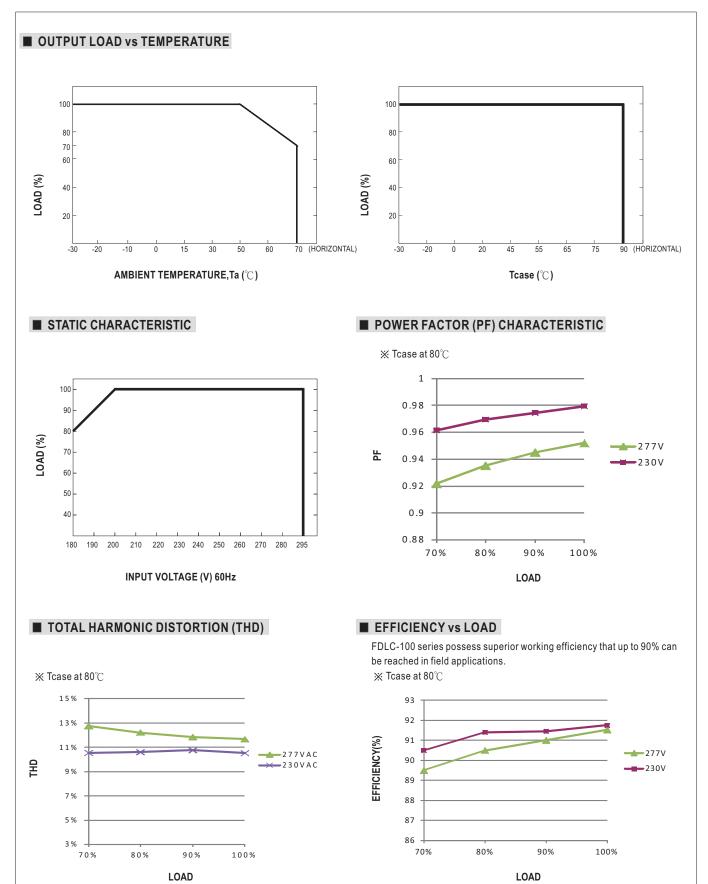


## ■ AC input voltage drop vs. output current characteristics

AC input drop	10%	8%	5%	3%
lo drop	<13%	<11%	<6%	<3%

NOTE: Output current will return to the rated value within 90ms

### ■ MECHANICAL SPECIFICATION

CASE NO.: 261A Unit:mm

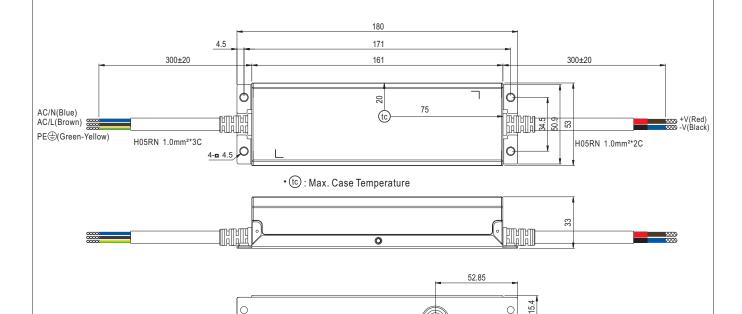

0

O Note: Please connect the case to FG for the complete EMC deliverance.

# ■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html