



Features

- Universal AC input / Full range
- 2 pole AC inlet IEC320-C8, Class II power unit
- No load power consumption < 0.3W
- **Energy efficiency level VI**
- Comply with EISA 2007/DoE
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- -20 ~ +70°C working temperature
- LED indicator for power on
- Dual output available (optional)
- 3 years warranty

Applications


- Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipments

Description

GP25B is a 25W triple-output desktop type green adaptor series, complying with the mandatory energy saving standard USA EISA 2007/DoE (Level VI). Adopting Class II design and utilizing the standard inlet IEC320-C8, it is designed without FG and uses the 94V-0 flame retardant plastic enclosure, which can effectively prevent electric shock hazards. This series operates from 90~264VAC and offers three models with the output voltage sets +5V/+12V/-5V, +5V/+12V/-12V and +5V/+15V/-15V. Its supreme advantages includes the less-than-0.3W no load power consumption, the capability of working under -20~+70°C ambient temperature, complete protection functions and three-year warranty and the compliance to the international safety certification such as CB, TUV, UL, CE and FCC. GP25B is a multiple-output green adaptor with high safety, high reliability and high quality.

Model Encoding

GP25 B 13A -R1B

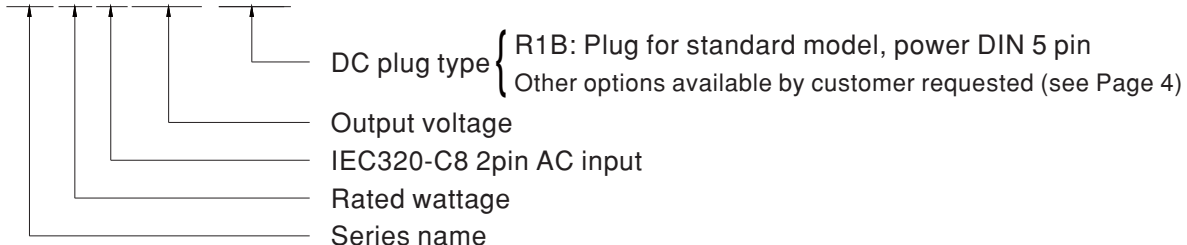





SPECIFICATION

ORDER NO.	GP25B13A-R1B	GP25B13D-R1B	GP25B14E-R1B	
OUTPUT	SAFETY MODEL NO.	GP25B13A	GP25B13D	
	DC VOLTAGE Note.2	5V 12V -5V	5V 12V -12V	
	RATED SET CURRENT	2.5A 1.2A 0.3A	2.5A 1A 0.3A	
	CURRENT RANGE	0.5 ~ 2.5A 0.2 ~ 1.2A 0.1 ~ 0.3A	0.5 ~ 2.5A 0.2 ~ 1A 0.1 ~ 0.3A	
	RATED POWER	28.5W	28W	
	RIPPLE & NOISE (max.) Note.3	50mVp-p 100mVp-p 50mVp-p	60mVp-p 120mVp-p 50mVp-p	
	VOLTAGE TOLERANCE Note.4	±5.0% -5.0 ~ +10% ±3.0%	±5.0% -5.0 ~ +5.0% ±3.0%	
	LINE REGULATION Note.5	±1.0% ±1.0% ±1.0%	±1.0% ±1.0% ±1.0%	
	LOAD REGULATION Note.6	±5.0% ±5.0% ±3.0%	±5.0% ±5.0% ±3.0%	
	SETUP, RISE, HOLD UP TIME	800ms, 50ms, 20ms / 230VAC	1200ms, 50ms, 16ms / 115VAC at full load	
INPUT	VOLTAGE RANGE Note.7	90 ~ 264VAC 135~ 370VDC		
	FREQUENCY RANGE	47 ~ 63Hz		
	EFFICIENCY (Typ.)	80%	80%	
	AC CURRENT	0.8A / 100VAC 0.4A / 230VAC		
	INRUSH CURRENT (max.)	Cold start 30A / 115VAC 60A / 230VAC		
	LEAKAGE CURRENT (max.)	0.75mA / 240VAC		
PROTECTION	OVERLOAD	110 ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed		
	OVER VOLTAGE	Protection type : Clamp by zener diode(5V only), output short		
ENVIRONMENT	WORKING TEMP.	-20 ~ +70°C (Refer to "Derating Curve")		
	WORKING HUMIDITY	20% ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH non-condensing		
	TEMP. COEFFICIENT	±0.03% / °C (-20 ~ 40°C)		
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes		
SAFETY & EMC (Note. 8)	SAFETY STANDARDS	UL60950-1, CSA22.2, EN60950-1 approved		
	WITHSTAND VOLTAGE	I/P-O/P:4242VDC, I/P-FG:2121VDC		
	ISOLATION RESISTANCE	I/P-O/P,I/P-FG:100M Ohms / 500VDC / 25°C / 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted emission	EN55032(CISPR32),FCC PART 15 / CISPR22, CAN ICES-3(B)/NMB-3(B)	Class B
		Radiated emission	EN55032(CISPR32),FCC PART 15 / CISPR22, CAN ICES-3(B)/NMB-3(B)	Class B
		Harmonic current	EN61000-3-2	Class A
	EMC IMMUNITY	Parameter	Standard	Test Level / Note
		ESD	EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact
		RF field susceptibility	EN61000-4-3	Level 2, 3V/m
EFT bursts		EN61000-4-4	Level 2, 1KV	
Surge susceptibility		EN61000-4-5	Level 3, 1KV/L-N	
Conducted susceptibility		EN61000-4-6	Level 2, 3V	
Voltage dips, interruption		EN61000-4-11	>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
OTHERS	LIFE	3 years : 100% load 40°C, 8hours / day		
	MTBF	620K hrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	107.5*67*36mm (L*W*H)		
	PACKING	0.3kg; 54pcs / 20kg / CARTON		
CONNECTOR	PLUG	See page 4		
	CABLE	See page 4		
NOTE	1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µf & 47µf capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.When measured between the light load (20% of rated load) and full load, the load regulation is within ±5% whereas the cross regulation is within ±15%. 7.Derating may be needed under low input voltages. Please check the static characteristics for more details. 8.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)			

■ Derating Curve

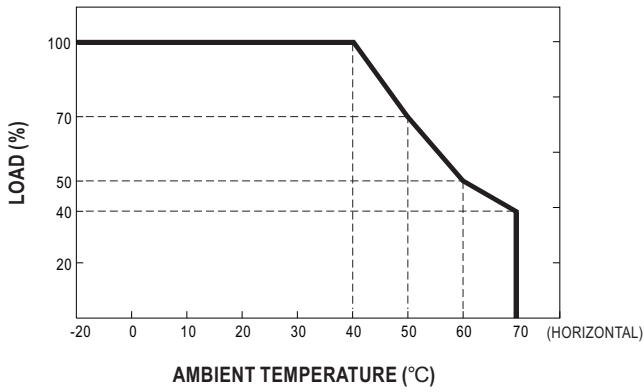


■ Static Characteristics

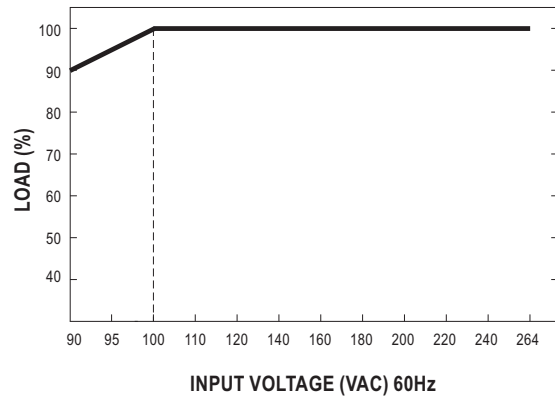


■ Mechanical Specification

Unit:mm

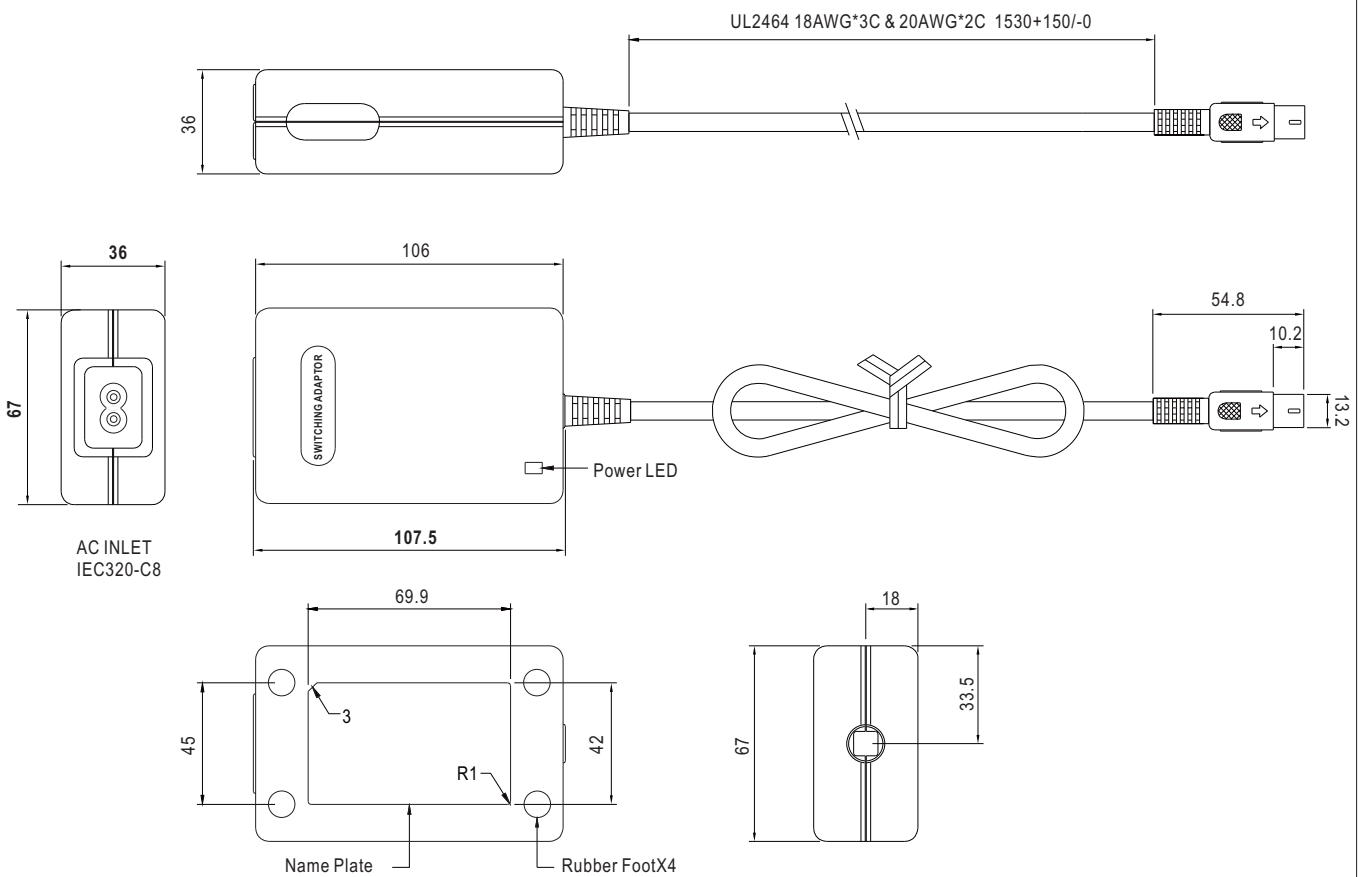


■ DC output plug

☉ Standard plug: R1B

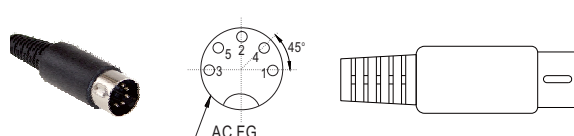DIN 5 Pin (male)	Type No.	Pin Assignment	
		PIN No.	Output
	R1B	1	COM
		2	COM
		3	+5VDC
		4	-Vout
		5	+Vout

☉ Optional DC plug:

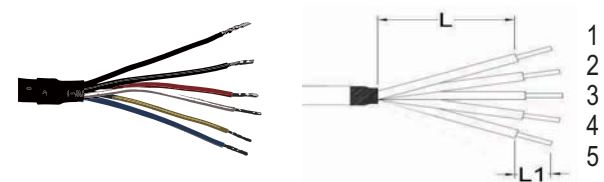Stripped and tinned leads	Type No.	Pin Assignment	
		PIN No.	Output
 <p>Length of Land L1 by request (MW's standard length, L: <u>70</u> mm, L1: <u>10</u> mm)</p>	by customer	1	COM
		2	COM
		3	+5VDC
		4	-Vout
		5	+Vout

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>